

## **ADVANCED POWER SYSTEMS INTERNATIONAL INC.**

558 Lime Rock Road  
Lakeville, CT 06039  
tel 860-435-2525 fax 860-435-2424  
Website – [www.fitchfuelcatalyst.com](http://www.fitchfuelcatalyst.com)

Technical Bulletin #5

### **ASTM Test Series of Gasoline Treated by the Fitch Fuel Catalyst**

#### **OBJECTIVE**

The objective of the experiment is to measure the impact of Fitch Fuel Catalyst on commercial grade gasoline. The ASTM test series selected included all tests employed for gasoline sold for transportation use in the US, plus the additional tests listed in the DoD Policy Guidelines for Use of Aftermarket Fuel and Lubricant products. The Fitch Catalyst is a permanent fuel treatment device.

#### **EXPERIMENTAL METHODS**

A 5 gallon sample of commercial gasoline containing 10% ethanol was procured. 7.5 liters of this fuel was exposed to the In Line Fitch Fuel Catalyst in a lab scale circulating system designed to treat the fuel in a manner representative of the exposure the fuel would experience in an engine application. ASTM tests were performed on samples of the blank untreated fuel and the treated fuel exposed to the fuel catalyst.

#### **FUEL PREPARATION**

A re-circulating system was constructed including a variable flow pump and flow meter. (Figure 1). The system was placed under a chemical hood. The system included a ball valve to allow removal of fuel samples of the treated fuel at the desired exposure time. The purpose of the system is to circulate fuel at a controlled and known rate through the fuel catalyst and return it to a reservoir in a manner similar to that in a fuel handling system on a vehicle.

Date of Treatment July 26, 2006

Fitch Fuel Catalyst - Model Number F 200-A

7.5 liters of fuel in Pyrex / glass reservoir

Pump flow rate 0.50 liters per minute. (1 complete turnover of fuel every 15 minutes.)

Start of circulation: 12:00 noon.

At 2-1/2 hours fuel was withdrawn from the system and the tests were performed on treated fuel and the untreated blank.

Temp: at start of circulation: 80.0 °F Temp: At end of 1 Hour : 80.5 °F Temp:

at end of 2 hour : 81.0 °F Temp: at end of 2.5 hour: 81.0 °F

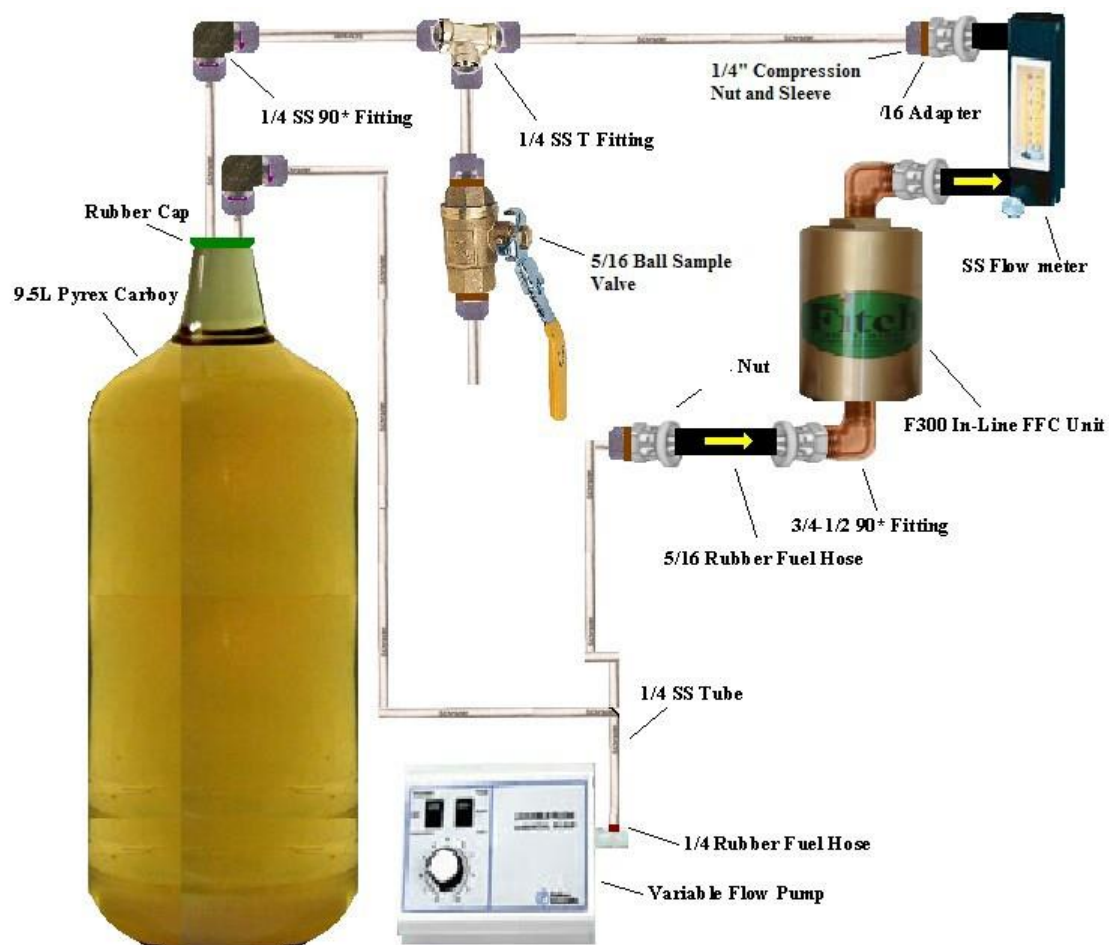


Figure 1  
 Fuel - Fuel Catalyst Treatment Circulating System

## RESULTS



Date 07/26/06

Advanced Power Systems International, Inc

558 Lime Rock Rd  
Lakeville, CT 06039

Re: Fitch Fuel Catalyst experiment - Gasoline

We have performed the series of ASTM tests required for gasoline plus additional ASTM tests requested by APSI, on a sample of commercial grade gasoline with 10% ethanol content. A portion of the fuel sample was exposed to a Fitch Fuel Catalyst at our laboratory in New Haven CT under our supervision. After exposure to the fuel catalyst, the ASTM tests were performed on the blank untreated fuel, and the treated fuel. Results are on the following page.

### Discussion of Results

Both the untreated and treated fuel are within specification and suitable for commercial use.

The fuel treated by the fuel catalyst had superior characteristics compared to the untreated fuel in the following categories that relate to performance:

ASTM D5291 Ultimate Analysis Ratio of Hydrogen to Carbon  
ASTM D2700 Motor Octane Number

The fuel treated by the fuel catalyst had superior characteristics compared to the untreated fuel in the following categories that relate to emissions:

ASTM D4814 Vapor / Liquid Ratio  
EPA VOC Reduction Percentage  
EPA TOX Reduction Percentage

The fuel exposed to the Fitch Fuel Catalyst is preferable from the perspective of the consumer and would be our recommendation compared to the untreated fuel.

Syed N. Naqvi  
Laboratory Manager  
Intertek Caleb Brett  
New Haven CT 06512  
Ph: (203) 467-3471  
Fax: (203) 467-8083